


O U T . 2 C M

www.tiles.ie

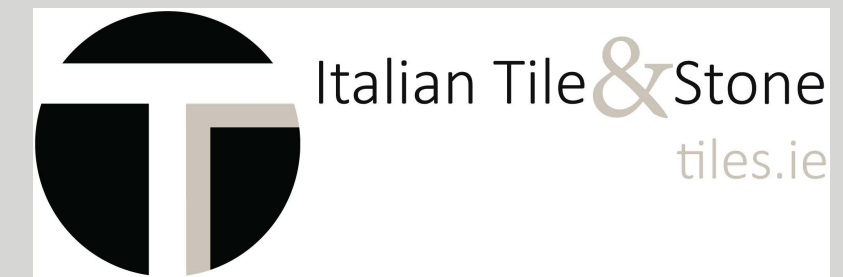

O U T . 2 C M

OUTDOOR DESIGN

OUT.2CM is the collection of 20 mm thick outdoor porcelain pavers inspired by the materials from Most important ranges. The OUT.2CM range combines outstanding technical performance with the utmost creative freedom and is available in va-rious sizes. With its high load and stress resistance and the ability to withstand even the most severe atmospheric conditions, OUT.2CM is ideal for use in heavy foot traffic areas in a wide range of settings including gardens, bars, restaurants, terraces, balconies, swimming pool surrounds, solariums and bathing establishments.



floor
OUT.2CM ATLANTIS SMOKE HAMMERED 60x90 20 mm

THE BENEFITS OF OUTDOOR PORCELAIN

Porcelain paving is both beautiful and hardwearing. OUT.2CM tiles are sustainably produced in Italy by pressing a combination of natural materials, including clays and sands. They are then fired at extremely high temperatures to remove all the moisture and create an incredibly durable, nonporous product. Our porcelain products combine unbeatable durability and ease of maintenance with the beauty and style of Italian design, as well as the assurance of sustainable manufacture and the full sales and technical support of a company with many years of experience in the ceramic sector.

SUSTAINABILITY

OUT.2CM stands for the best in manufacturing quality as well as exceptional green credentials and environmental sustainability. For years now, has always adopted robust and advanced environmental measures in its production processes and is committed to low emission levels, 100% water recycling, reuse of all processing residues and reduced energy consumption through heat recovery and transfer processes. Porcelain stoneware is an inert, 100% recyclable material. A product is a doubly sustainable choice because the ceramic bodies have been certified as Ecobody since 2013, which means they contain at least 40% high-quality raw materials recycled from other production processes. Products made from Ecobody qualify for LEED credits (leadership in energy and environmental design).

WHY CHOOSE CERAMICS



SAFE
Ceramic is a safe, natural material that originates from the earth. It does not contain plastic and is completely recyclable.



HYGIENIC
Ceramic is one of the most hygienic of all materials. It's odourless and easy to clean using any household detergent.



LONG - LASTING
Ceramic is a durable and hard-wearing material. It's easy to clean and always looks as good as new.



IT DOES NOT BURN
It does not burn and in the event of fire does not release substances that are harmful to people or the environment.



RESISTANT
Ceramic is a strong material that does not deform or freeze and is resistant to even the most aggressive chemical detergents.



VERSATILE
With its infinite variety of sizes and surfaces, ceramic is suitable for any application, whether floors or walls, countertops or tables.



STABLE
A ceramic floor is practical, stable and easy to install in shops, restaurants, offices and any other location.



ENVIRONMENT - FRIENDLY
Ceramic is a sustainable material that is healthy and environment-friendly because it is produced in full compliance with European standards.

COMPLETENESS AND ATTENTION TO DETAIL

At we understand that it's the little extras and finishing touches that make all the difference to your outdoor space. This is why the range of outdoor paving is complemented by a wide selection of special trims, for use on steps, pavements and driveways. For swimming pools, spe-cial drainage gratings are available for seamless integration with the paving tiles.



floor
OUT.2CM NATIVE ASH 90x90 20 mm,
BULLNOSE 90x90



floor
OUT.2CM DOLPHIN CLAY 30x120 20 mm,
ELEMENTO L 15x60x5

DISCOVER THE SURFACES

CONTEMPORARY

For a contemporary style garden, has explored the world of concrete, from the most minimalist to the more unique ones, such as the visual effect of decayed plaster.



STONE

What could be more authentic and appealing than a stone or marble floor? Porcelain reproduces the natural variability and texture of these materials.

WOOD

With one of the largest ranges of external wooden porcelain, ABK created a varied collection to suit all tastes; from clean lines and elegant finishes to reclaimed and rustic finishes.




MATERIALS

STONE

ATLANTIS 60x90	PAG 10				
		SMOKE HAMMERED			
NATIVE 90x90	PAG 12				
		FOG			
GENT 60x120	PAG 16				
		DARK			
UNIKA 40x80	PAG 18				
		SMOKE			
RE-WORK 40x80	PAG 20				
		MULTI FOG			

OUT. 2 C M


ATLANTIS




60x90
ATLANTIS SMOKE HAMMERED
F 77,90



60x90
ATLANTIS GREY HAMMERED
F 77,90




60x90
ATLANTIS SAND HAMMERED
F 77,90



60x90
ATLANTIS MOON HAMMERED
F 77,90

20 mm

Size
60x90 cm | 24"x36"

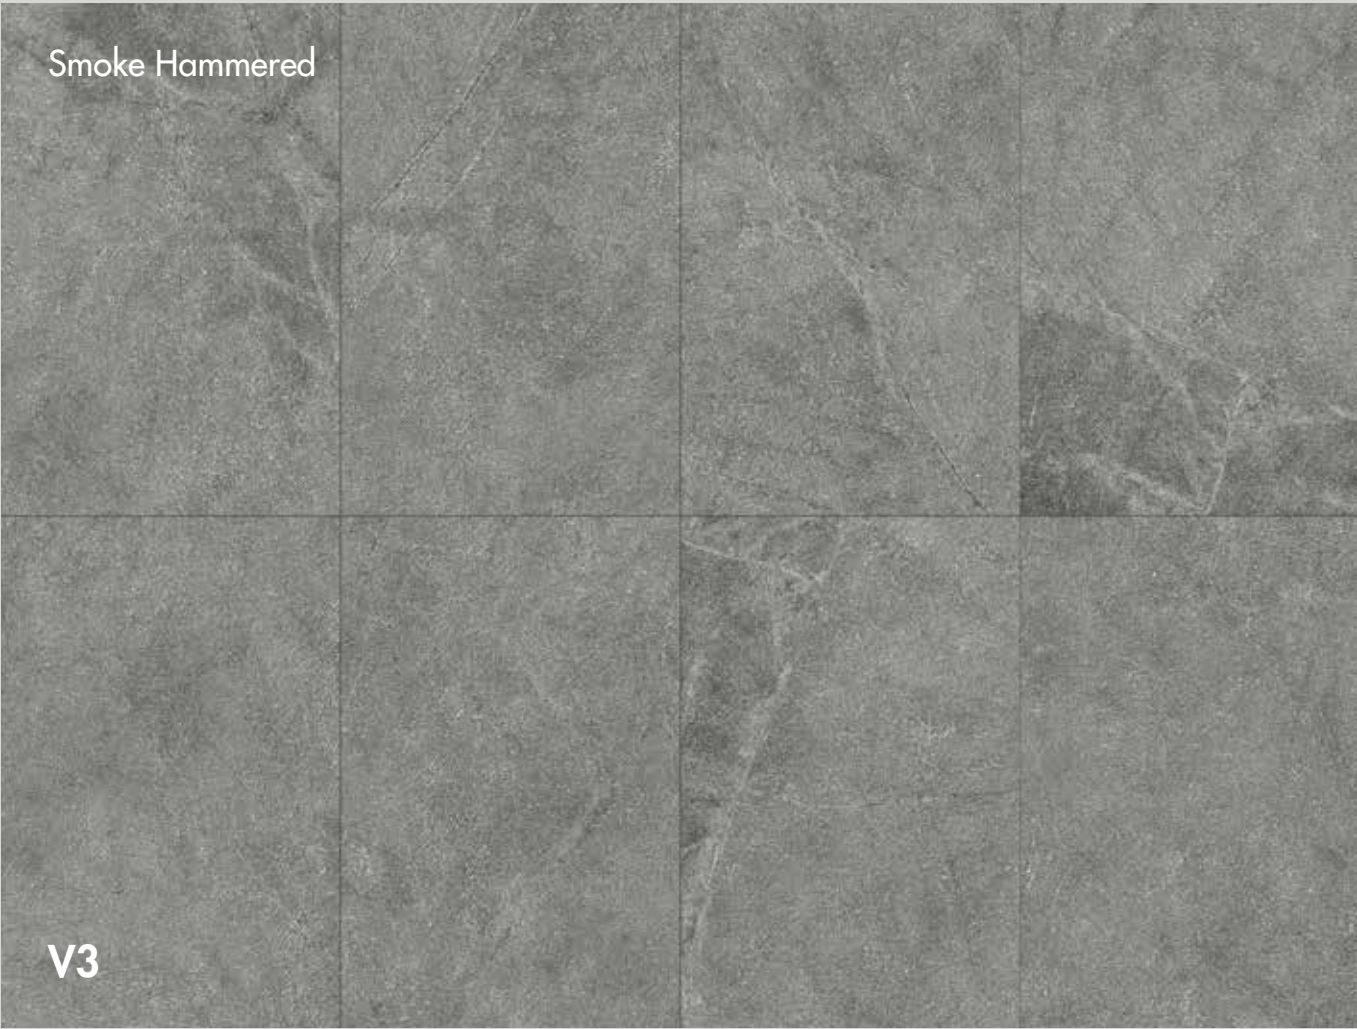


floor
OUT.2CM ATLANTIS SMOKE HAMMERED 60x90 20 mm, GRIGLIA 15x60, ELEMENTO L 15x60x5

STONE

OUT. 2 CM

NATIVE



90x90
NATIVE RED
F 88,50



90x90
NATIVE FOG
F 88,50



90x90
NATIVE ASH
F 88,50

20 mm

Size
90x90 cm | 36"x36"



floor
OUT.2CM NATIVE RED 90x90 20 mm
wall
NATIVE RED 160x320



bench
NATIVE FOG 160x320


volume top
OUT.2CM NATIVE FOG 90x90 20 mm

floor
OUT.2CM NATIVE ASH 90x90 20 mm, BULLNOSE NATIVE ASH

wall
NATIVE ASH 160x320

OUT. 2 C M

GENT



60x120
GENT DARK
F 81,50



60x120
GENT BLUE
F 81,50



60x120
GENT ASH
F 81,50



60x120
GENT DARK LINE
F 81,50




60x120
GENT BLUE LINE
F 81,50



60x120
GENT ASH LINE
F 81,50

20 mm

Size
60x120 cm | 24"x48"

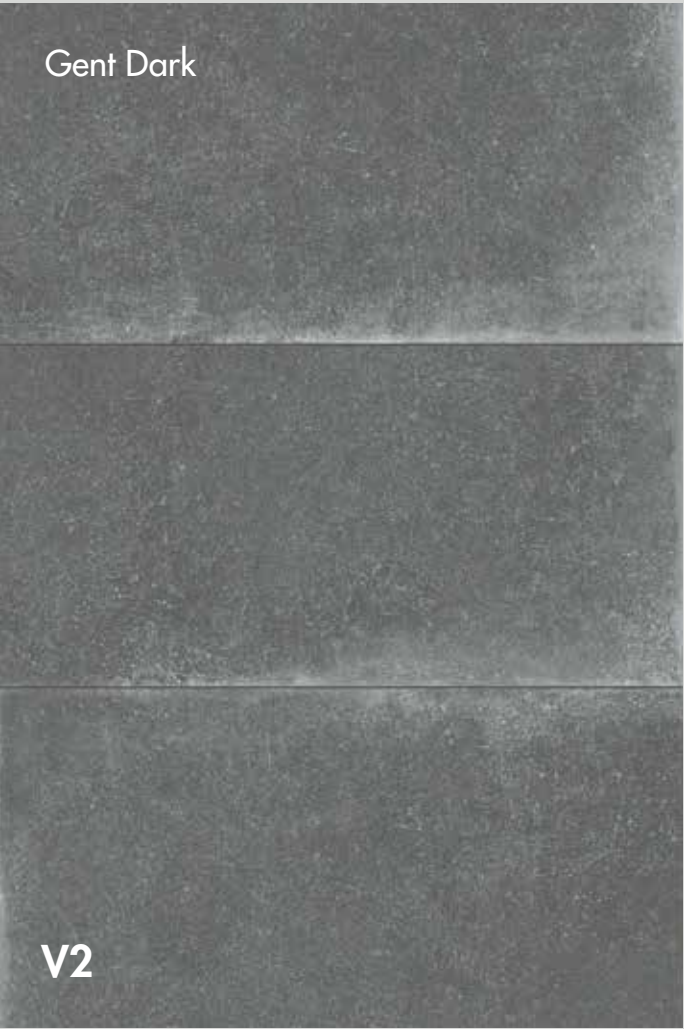


OUT. 2 C M


UNIKA



40x80
UNIKA SMOKE
F 77,90



40x80
UNIKA GREY
F 77,90



40x80
UNIKA ECRU
F 77,90

▼
20 mm
▲


Size
40x80 cm | 16"x32"




floor
OUT. 2CM UNIKA SMOKE 40x80 20 mm

OUT. 2 C M

RE-WORK



40x80
RE-WORK MULTI FOG
F 77,90



40x80
RE-WORK MULTI BEIGE
F 77,90

20 mm

Size
40x80 cm | 16"x32"



OUT. 2 C M

MISCELA CONCRETE



60x120
MISCELA CONCRETE ASH
F 81,50



60x120
MISCELA CONCRETE GREY
F 81,50

20 mm

Size
60x120 cm | 24"x48"



CONTEMPORARY


floor
OUT. 2CM MISCELA CONCRETE ASH 60x120 20 mm




floor
OUT.2CM MISCELA CONCRETE GREY 60x120 20 mm, ELEMENTO L 15x60x5

OUT. 2 C M

FLOW




60x120
FLOW BASE TAUPE
F 81,50



60x120
FLOW BASE ASH
F 81,50




60x120
FLOW FORM TAUPE
F 81,50



60x120
FLOW FORM ASH
F 81,50

▼
20 mm
▲


Size
60x120 cm | 24"x48"

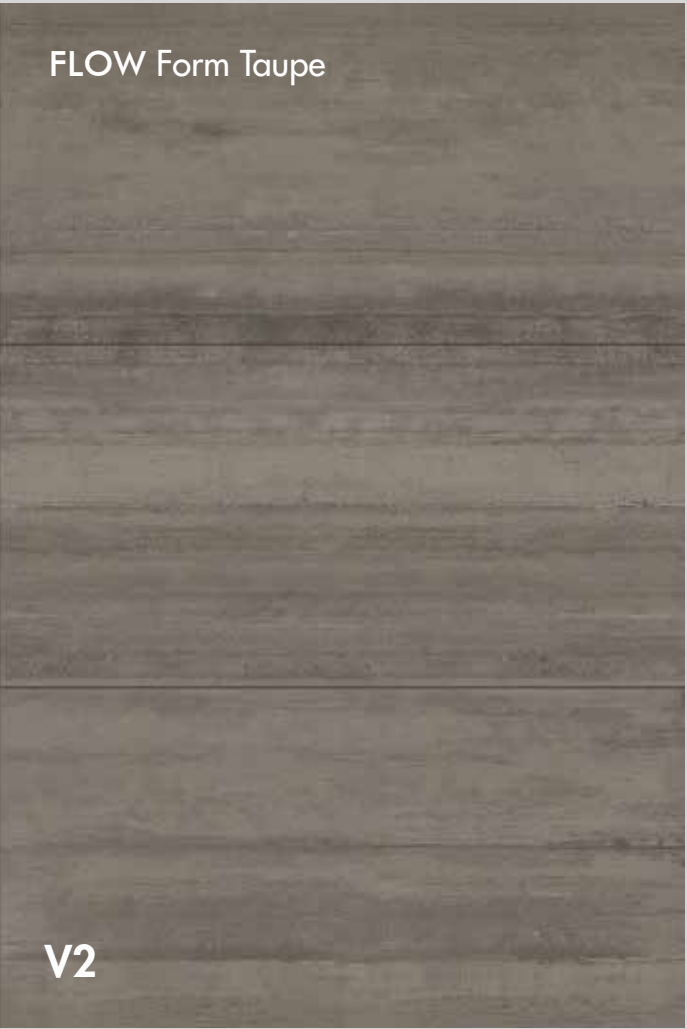


floor
OUT.20 FLOW FORM TAUPE 60x120 20 mm

OUT. 2 CM

SOUL



90x90
SOUL ROPE
F 88,50



90x90
SOUL GREY
F 88,50

▼
20 mm
▲


Size
90x90 cm | 36"x36"




floor
OUT.2CM SOUL ROPE 90x90 20 mm

O U T . 2 C M

ECO CHIC



30x180
ECO CHIC NATURALE
F 98,50



30x180
ECO CHIC AVANA
F 98,50

▼
20 mm
▲

Size
30x180 cm | 12"x72"






wall
WIDE&STYLE RAINBOW SALVIA 120x278

floor
OUT.2CM ECO CHIC AVANA 30x180 20 mm, GRIGLIA 18x90, BULLNOSE
30x180


OUT. 2 CM

DOLPHIN




30x120
DOLPHIN CLAY

F 81,50



30x120
DOLPHIN OAK

F 81,50




30x120
DOLPHIN GREY

F 81,50

20 mm


Size
30x120 cm | 12"x48"

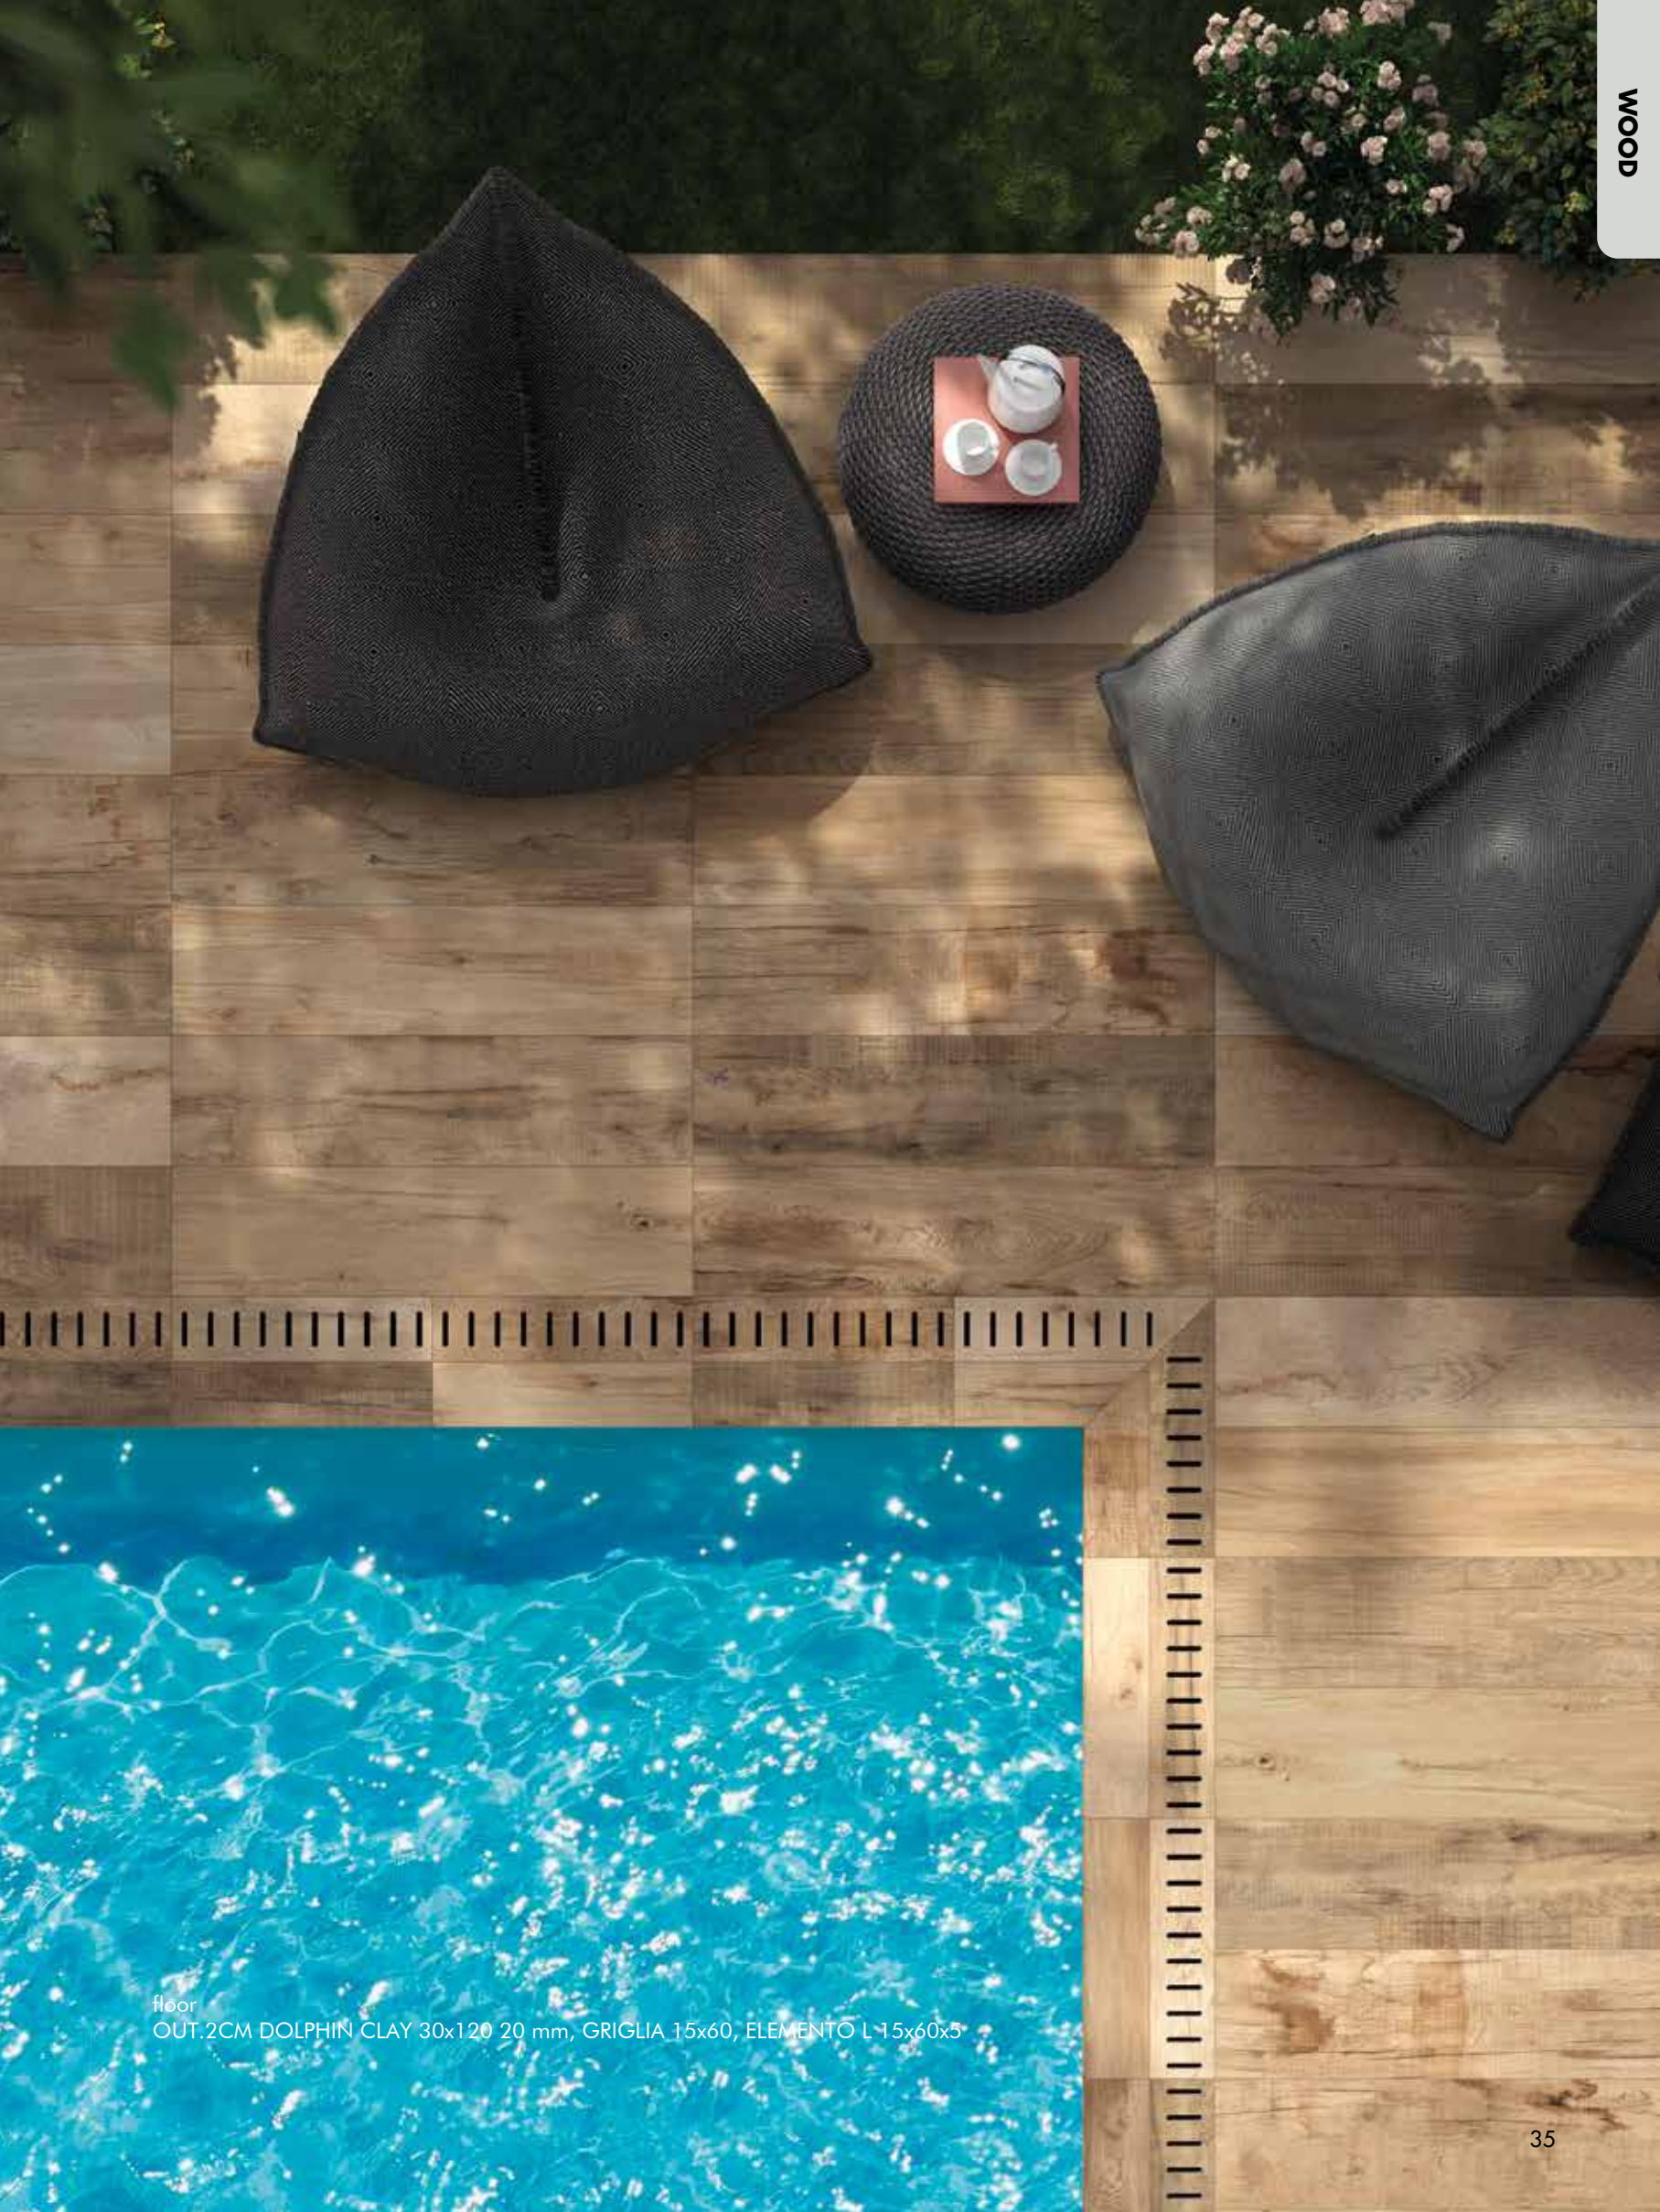




O U T . 2 C M

SOLERAS



30x120
SOLERAS AVANA
F 81,50

























































30x120
SOLERAS NATURALE
F 81,50

▼
20 mm
▲

Size
30x120 cm | 12"x48"



SPECIAL TRIMS

COLLECTIONS	COLOURS					 						
		BULLNOSE	ELEMENTO L		ELEMENTO L GRIP		GRIGLIA		ANG. GRIGLIA SX		ANG. GRIGLIA DX	
ATLANTIS	GREY HAMMERED	60x90 Rett. 20 mm  1 PZ 149,90	-	15x60x5 Rett. 20 mm  2 PZ 88,90	-	15x60x5 Rett. 20 mm  2 PZ 99,90	-	15x60 Rett. 20 mm  4 PZ 168,90	-	15x60 Rett. 20 mm  4 PZ 228,90	-	-
	SMOKE HAMMERED		-		-		-		-		-	
	SAND HAMMERED		-		-		-		-		-	
	MOON HAMMERED		-		-		-		-		-	
NATIVE	RED	90x90 Rett. 20 mm  1 PZ 179,90	-	15x90x5 Rett. 20 mm  2 PZ 118,90	-	15x90x5 Rett. 20 mm  2 PZ 138,90	-	18x90 Rett. 20 mm  4 PZ 198,90	-	18x90 Rett. 20 mm  4 PZ 258,90	-	-
	ASH		-		-		-		-		-	
	FOG		-		-		-		-		-	
GENT	ASH	-	-	15x60x5 Rett. 20 mm  2 PZ 88,90	-	15x60x5 Rett. 20 mm  2 PZ 99,90	-	15x60 Rett. 20 mm  4 PZ 168,90	-	15x60 Rett. 20 mm  4 PZ 228,90	-	-
	BLUE		-		-		-		-		-	
	DARK		-		-		-		-		-	
UNIKA	ECRU	-	-	20x40x5 Rett. 20 mm  2 PZ 62,90	-	20x40x5 Rett. 20 mm  2 PZ 79,90	-	20x80 Rett. 20 mm  2 PZ 219,90	-	20x80 Rett. 20 mm  2 PZ 299,90	-	-
	GREY		-		-		-		-		-	
	SMOKE		-		-		-		-		-	
RE-WORK	MULTI FOG	-	-	20x40x5 Rett. 20 mm  2 PZ 62,90	-	20x40x5 Rett. 20 mm  2 PZ 79,90	-	20x80 Rett. 20 mm  2 PZ 219,90	-	20x80 Rett. 20 mm  2 PZ 299,90	-	-
	MULTI BEIGE		-		-		-		-		-	
BLEND CONCRETE	ASH	-	-	15x60x5 Rett. 20 mm  2 PZ 88,90	-	15x60x5 Rett. 20 mm  2 PZ 99,90	-	15x60 Rett. 20 mm  4 PZ 168,90	-	15x60 Rett. 20 mm  4 PZ 228,90	-	-
	GREY		-		-		-		-		-	
LAB325	BASE ASH	60x120 Rett. 20 mm  1 PZ 168,90	-	15x60x5 Rett. 20 mm  2 PZ 88,90	-	15x60x5 Rett. 20 mm  2 PZ 99,90	-	15x60 Rett. 20 mm  4 PZ 168,90	-	15x60 Rett. 20 mm  4 PZ 228,90	-	-
	BASE TAUPE		-		-		-		-		-	
GHOST	GREY	-	-	15x90x5 Rett. 20 mm  2 PZ 118,90	-	15x90x5 Rett. 20 mm  2 PZ 138,90	-	18x90 Rett. 20 mm  2 PZ 198,90	-	18x90 Rett. 20 mm  2 PZ 258,90	-	-
	ROPE		-		-		-		-		-	
ECO CHIC	NATURALE	-	-	15x90x5 Rett. 20 mm  2 PZ 118,90	-	15x90x5 Rett. 20 mm  2 PZ 138,90	-	18x90 Rett. 20 mm  2 PZ 198,90	-	18x90 Rett. 20 mm  2 PZ 258,90	-	-
	AVANA		-		-		-		-		-	
DOLPHIN	CLAY	-	-	15x60x5 Rett. 20 mm  2 PZ 88,90	-	15x60x5 Rett. 20 mm  2 PZ 99,90	-	15x60 Rett. 20 mm  4 PZ 168,90	-	15x60 Rett. 20 mm  4 PZ 228,90	-	-
	OAK		-		-		-		-		-	
	GREY		-		-		-		-		-	
SOLERAS	NATURALE	30x120 Rett. 20 mm  1 PZ 129,90	-	15x60x5 Rett. 20 mm  2 PZ 88,90	-	15x60x5 Rett. 20 mm  2 PZ 99,90	-	15x60 Rett. 20 mm  4 PZ 168,90	-	15x60 Rett. 20 mm  4 PZ 228,90	-	-
	AVANA		-		-		-		-		-	

TECHNICAL DETAILS



SAFE

Read the following instructions carefully before handling the tiles:
Due to the size and weight of our products, we always recommend using the utmost caution when lifting and handling. Ensure the products are on a level, stable surface before removing any packaging. Always handle with care to avoid the risk of breakage and chipping. As a guideline, products measuring 900 x 600 mm and larger should always be handled by two people. Always wear gloves and safety footwear when handling the product. Always use safety goggles and appropriate respiratory protection when using cutting equipment. Wear suitable work overalls to protect exposed skin from cement and avoid loose clothing when working with power tools. If you require any further health and safety guidance, please contact the company's sales representative.



PREPARATION

All products must be checked on arrival, so that in the unlikely event there is a problem there is time to rectify the situation. Pay particular attention to the batch codes to ensure the same batch is being used throughout your project. Any broken tiles, assuming there are only one or two, can be put to one side as they may be useful for off-cuts. No responsibility will be accepted for any delays or additional costs incurred if these pre checks have not been completed.



INSTALLATION EQUIPMENT

All products must be checked on arrival, so that in the unlikely event there is a problem there is time to rectify the situation. Pay particular attention to the batch codes to ensure the same batch is being used throughout your project. Any broken tiles, assuming there are only one or two, can be put to one side as they may be useful for off-cuts. No responsibility will be accepted for any delays or additional costs incurred if these pre checks have not been completed.



SETTING OUT AND PREPARING THE SUBBASE

All porcelain paved areas, from paths to patios and driveways, require a stable base. The depth, strength and composition of this base varies according to the planned use of the paved surface and the condition and makeup of the existing ground. As every project is different thorough investigation and judgement will need to be made at the start of the project to ensure an adequate base is laid and to avoid future problems of sunken patios and the expense of lifting and relaying.



SLOPES

All porcelain paved areas must be adequately drained. This can be achieved by sloping the tiles to direct the surface water away from any buildings towards a suitable disposal point, such as a gully, drain or the edge of the garden, allowing circa 15mm for every 1000mm of paving.



PREPARING THE SUBBASE

General subbase material aggregate is required to give strength and stability to your patio. Fill the dug-out area and rake out the aggregate to create an even layer, roughly 30 mm below the proposed height of the patio. Then using a vibrating plate compactor, consolidate the aggregate to a compressed height of 50 mm below the proposed patio height.



LAYING PATTERNS

Choosing a design for your patio will of course vary depending on your chosen product, the number of paving sizes and the overall size of the patio. Whilst there is no limit to you or your landscape designer's creativity, the most common arrangements are stack bond, like a chess board design, or coursed, where the paving is laid in lines or courses of the same width. Stack bond needs paving tiles of the same size, while coursed layouts rely on the porcelain tiles sharing the same width with varying lengths.



FLEXIBLE TILE GROUT JOINTING

Porcelain tiles should not be butt jointed, and we recommend a minimum external joint. Use tile spacers to create uniform spacing between the tiles. The tiles must be jointed with a suitable non-porous, water repellent flexible tile grout. Rapid setting cement based grouting compounds are unaffected by weather, unlikely to discolour or suffer algae and weed growth. Moreover, they harden to form a perfect joint and allow foot traffic in approximately 90 minutes.



CLEANING AND MANTEINANCE

Porcelain paving tiles have the unique properties of being weather resistant and extremely hard with a low porosity, which makes them an ideal low maintenance external product. They do not need to be covered and can easily be cleaned with a mild detergent, a rubber brush and a jet washer.

ADVICE FOR LAYING



TRADITIONAL INSTALLATION
Traditional installation is ideal for floorings that will be driven over by vehicles.



DRY INSTALLATION ON GRAVEL
Installing on gravel enables perfect drainage of rainwater.



DRY INSTALLATION ON GRASS
Installing directly on top of grass enables the creation of paths and walkways that blend in perfectly with the surroundings.



DRY INSTALLATION ON SAND
Installing on top of sand is ideal for creating paths and walkways on beaches and beach bars.



OUTDOOR RAISED LAYING SYSTEM
The raised floor system foresees the use of self-levelling, adjustable or fixed load bearing supports that easily adapt to the floor below in total safety. The system is suitable to create laying designs with variable heights from the ground, which range between 25 and 270 mm. The independence of the flooring from the supports guarantees the absorption of any structural movements. The raised system does not require a cement screed and reduces the load on the bearing structure. The open joints between the tiles allow rainwater to easily drain off, avoiding any risk of water accumulation or stagnation. The gap between the tread surface and the support surface favours ventilation and heat insulation. This solution allows for the installation of systems and piping in the gap, which can be easily inspected even once the floor has been installed.


LAYING PATTERNS

SUPPORTS FOR RAISED LAYING SYSTEM USAGE

Tile size	Linear laying	Alternate laying
40x80 / 16"x32"	6,25 pz/m ²	6,25 pz/m ²
90x90 / 36"x36"	5 pz/m ²	5 pz/m ²
60x90 / 24"x36"	3,70 pz/m ²	3,70 pz/m ²
30x120 / 12"x48"	5,6 pz/m ²	5,6 pz/m ²
60x120 / 24"x48"	2,78 pz/m ²	2,78 pz/m ²
30x180 / 12"x72"	5,56 pz/m ²	5,56 pz/m ²


N.B the calculation takes into account a central support at the long side of the tile.

EX. : LINEAR LAYING







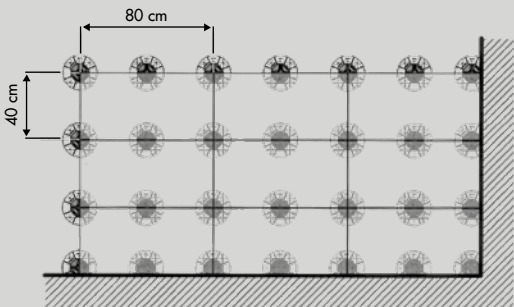


40x80 cm (16"x32")

EX. : ALTERNATE LAYING

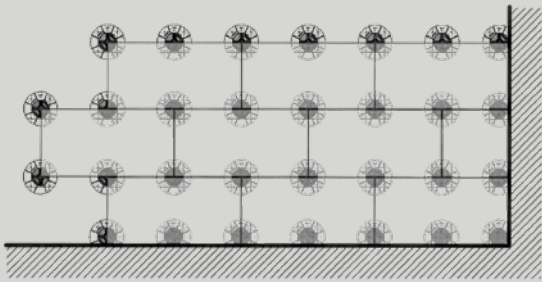

40x80 cm (16"x32")

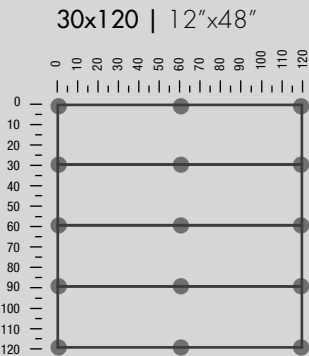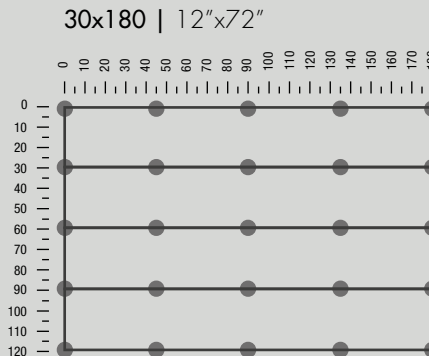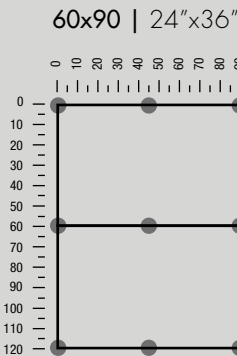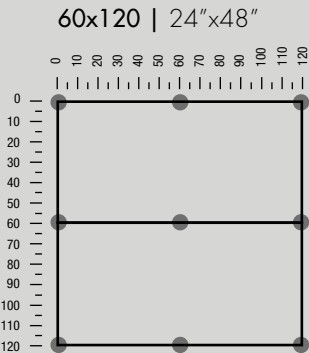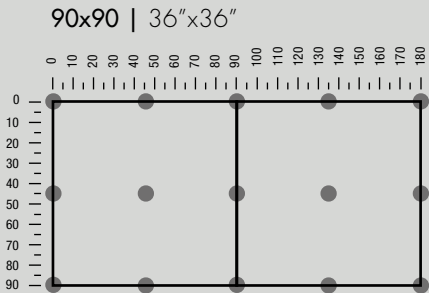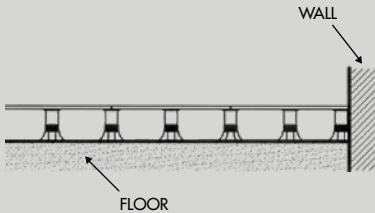

TECHNICAL CHARACTERISTICS

CLASSIFICATION IN ACCORDANCE WITH UNI EN 14411 (ISO 13006) ANNEX G-Group GL

FULL BODY COLORED PORCELAIN

PHYSICAL-CHEMICAL PROPERTIES	NORM	VALUE PRESCRIBED FROM THE NORMS	VALUE
LENGTH AND WIDTH OF THE AVERAGE-SIZES TILE	UNI EN ISO 10545/2	± 0,5%	ACCORDING
THICKNESS	UNI EN ISO 10545/2	± 5%	ACCORDING
WARPAGES OF EDGES	UNI EN ISO 10545/2	± 0,5%	ACCORDING
WEDGING	UNI EN ISO 10545/2	± 0,6%	ACCORDING
FLATNESS	UNI EN ISO 10545/2	± 0,5%	ACCORDING
WATER ABSORPTION	UNI EN ISO 10545/3	E ≤ 0,5%	ACCORDING
BENDING STRENGTH	UNI EN ISO 10545/4	≥ 35 N/mm²	≥ 47
BREAKING STRENGTH	UNI EN ISO 10545/4	≥ 1300 N	≥ 12000
ABRASION RESISTANCE FOR GLAZED TILES	UNI EN ISO 10545/7	ACCORDING TO THE DESTINATION OF FINAL USE	ACCORDING
THERMAL SHOCK RESISTANCE	UNI EN ISO 10545/9	REQUIRED	RESISTS
FROST RESISTANCE	UNI EN ISO 10545/12	REQUIRED	FROST PROOF
CHEMICAL RESISTANCE	UNI EN ISO 10545/13	MIN GB	ACCORDING
RESISTANCE TO STAINING	UNI EN ISO 10545/14	GL ≥ MINIMO CLASSE 3	ACCORDING
SLIP RESISTANCE	B.C.R.A. C.A.	μ 0,19 - DANGEROUSLY SLIPPERY 0,20 < μ < 0,39 - EXCESSIVELY SLIPPERY 0,40 < μ < 0,74 - SATISFACTORY GRIP μ 0,75 - EXCELLENT GRIP	>0,40
	B.C.R.A. G.B.		>0,40
	ASTM C 1028 (S.C.O.F.)	SLIP RESISTANT (> 0,60)	>0,60 DRY >0,60 WET
	DIN 51130	BASING ON THE ENVIRONMENT OR THE WORKING AREA	R11
	DIN 51097	-	A+B+C
	ANSI A 137-1:2012 (D.C.O.F.)	> 0,42	>0,42

PACKAGING

Nominal size	Finish	Thickness	Work size (mm)	Packing	Pcs/Box	Sqm/Box	Kg/Box	Box/Packing	Pcs Total	Sqm total	Kg Packing	Kg Total
30x180 12"x72"	rett.	20	300x1800	pallet	1	0,54	25,11	52	52	28,08	20	1.326
60x120 24"x48"	rett.	20	596x1195	pallet	1	0,72	32,65	30	30	21,60	20	1.000
30x120 12"x48"	rett.	20	295x1200	pallet	2	0,72	33,62	32	64	23,04	20	1.096
90x90 36"x36"	rett.	20	896x896	pallet	1	0,81	36,60	30	30	24,30	20	1.118
60x90 24"x36"	rett.	20	600x900	pallet	1	0,54	24,80	30	30	16,20	20	764
40x80 16"x32"	nat.	20	-	pallet	2	0,64	28,26	24	48	15,36	20	698

The minimum sales quantity for all items (plain tiles, decorations and special trims) is one full box.
Data referring to packaging have been update at time of printing; the actual data may be slightly different.
Due to working process special trims and decors, may show variation in tonality.



Italian Tile & Stone

TERENURE SHOWROOM

Italian Tile and Stone 56
Terenure Road North, Dublin,
D6W AW88
T 01 492 4891
E info@tiles.ie

COMMERCIAL DIVISION

Italian Tile and Stone 56
Terenure Road North, Dublin,
D6W AW88
T 01 907 3700
E commercial@tiles.ie

SWORDS SHOWROOM

Italian Tile and Stone
6 Town Centre Mall, Main Street
Swords, Co. Dublin, K67 CD86 **T** 01
840 5057
E swords@tiles.ie

www.tiles.ie