



Italian Tile & Stone
tiles.ie

BEACON

CONTEMPORARY SURFACES

COMPACT

www.tiles.ie

BEACON

COLLECTION


CONTEMPORARY SURFACES



C A L C E



C E N E R E

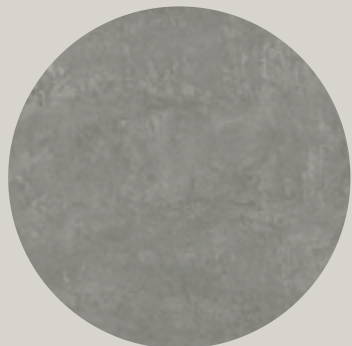

A N T R A C I T E



T O R T O R A

A LIGHTLY BRUSHED RESIN EFFECT REVIVES ON THE
SURFACE OF THE PORCELAIN STONEWARE
AVAILABLE IN FIVE SOFT AND MODERN SHADES.
A SLIGHTLY WAVY AND IRREGULAR TEXTURE
CHARACTERIZED BY A VEILING EFFECT ENHANCING
DEPTH, WHICH IS SUITABLE FOR THOSE WHO ARE
LOOKING FOR CREATIVE AND ORIGINAL SOLUTIONS.
MOSAICO AND 30X60 3D HEX DÉCORS ROUND OUT
AND COMPLETE THE RANGE.




production
industrial

thickness
9.5 mm

use

housing environments, bathrooms or re ined commercial locations as well as public spaces.

sizes
60x119.5 - 60x60 - 30x60 - 80x80



decoration
3D hexagon

complementary pieces
battiscopa smaltato - gradino - gradone - gradone angolare - elemento a L



C A L C E

**CALCE**

60x119.5_24"x48"

**CALCE**

60x119.5_24"x48"

**CALCE**

80x80 _ 32"x32"

30x60 _ 12"x24 3D hex

60x119.5 _ 24"x48"

**CALCE**

80x80 _ 32"x32"



C E N E R E

**CENERE**

60x119.5_24"x48"



**CENERE**

60x60 _ 24"x24"

**CENERE**

60x60 _ 24"x24"





A N T R A C I T E



ANTRACITE
80x80 _ 32"x32"



ANTRACITE
80x80 _ 32"x32"

**ANTRACITE**

60x60 _ 24"x24"

CALCE

60x60 _ 24"x24"

30x60_12"x24"





T O R T O R A

**TORTORA**

60x119.5_24"x48"

**TORTORA**

60x119.5_24"x48"

30x60_12"x24" 3D hex

**TORTORA**

Mosaico 30x30 _ 12"x12"

30x60_12"x24"

60x60 _ 24"x24"

**TORTORA**

Mosaico 30x30 _ 12"x12"

**TORTORA**

60x60 _ 24"x24"


60x60_ 24"x24" Grip

**TORTORA**

60x60_ 24"x24" Grip

60x119.5_ 24"x48"

CALCE

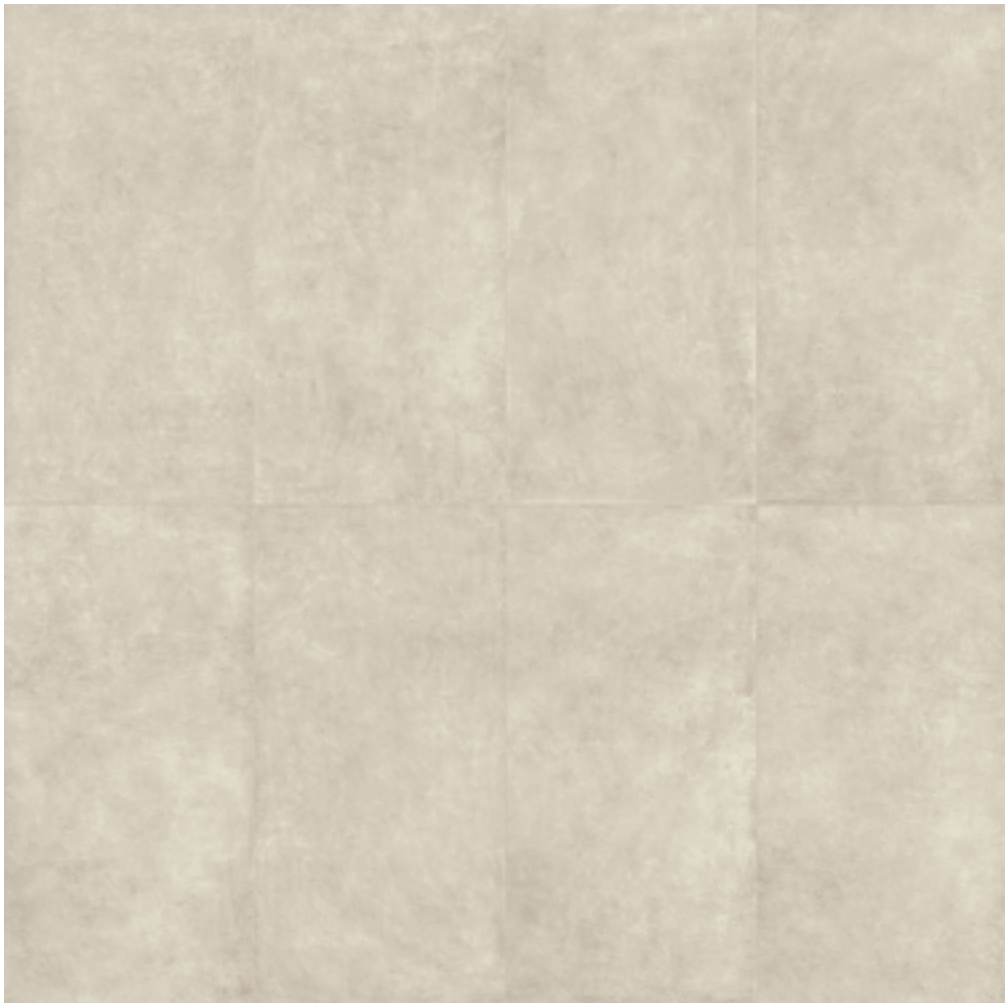

CALCE MOSAICO



CALCE 3D HEX

CENERE



CENERE MOSAICO



CENERE 3D HEX

A N T R A C I T E



ANTRACITE MOSAICO



ANTRACITE 3D HEX

T O R T O R A





TORTORA MOSAICO




TORTORA 3D HEX

TECHNICAL INFORMATION & PLUS

SIZES

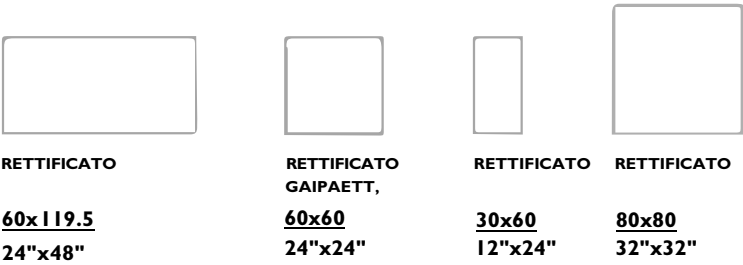

SPECIAL ITEMS

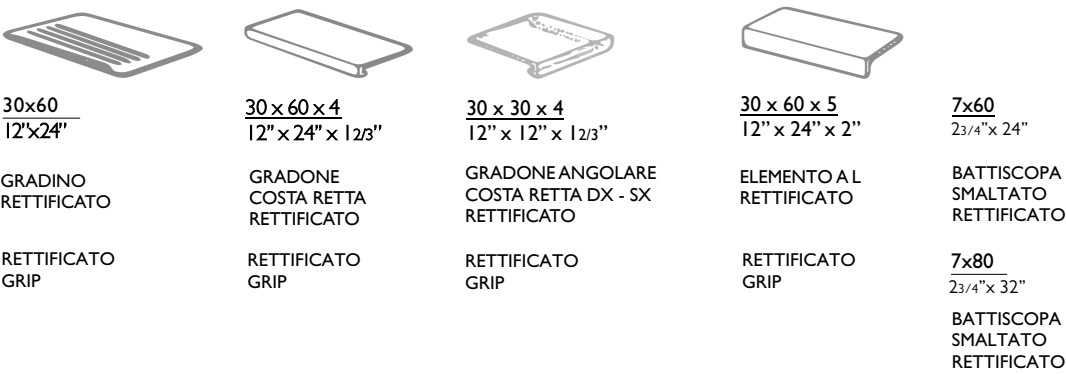

TECHNICAL FEATURES

	standards	characteristics or properties	declared values
	ISO 10545-3	water absorption	< 0.5%
	ISO 10545-4	(R) breaking strength	35 N/mm²
	ISO 10545-13	resistance to acid	GLA
	ISO 10545-12	frost resistance	frost proof
	ISO 10545-14	stain resistance	
	ISO 10545-2	surface flatness	
	ISO 10545-2	thickness	9,5 mm
	DIN51097 DIN51130 ANSI A 137.1 DCOF BOT 3000 E	dynamic coefficient of friction (slipperiness)	A+B R10 > 0.42
	DIN51097 DIN51130 ANSI A 137.1 DCOF BOT 3000 E	dynamic coefficient of friction (slipperiness)	A+B+C R11 > 0.42
		color shade	V2 slight variation
	ISO 10545-2	orthogonality	± 0.6%

PACKING

mm	inch		thickness	pcs/box	sqm/box	kgs/box	box/pal	sqm/pal	kgs/pal
60x119.5	24"x48"	rettificato	9.5	2	1.43	30.75	30	43.02	922.50
80x80	32"x32"	rettificato	9.5	2	1.28	30.80	40	51.20	876.00
60x60	24"x24"	rettificato grip	9.5	3	1.08	21.90	40	43.20	888.00
30x60	12"x24"	rettificato	9.5	6	1.08	22.10	48	51.84	1060.80
30x30	12"x12"	mosaico		11	0.99	19.00	36	35.64	684.00
30x60	12"x24"	3D hex		6	1.08	22.00	40	43.20	888.00
7x60	2 3/4"x 24"	battiscopa smaltato rettificato		12		10.20			
7x80	2 3/4"x 32"	battiscopa smaltato rettificato		8		10.40			
30x60	12"x24"	gradino rettificato grip		8		31.20			
30x60	12"x24"	gradone costa retta rettificato grip		4		17.20			
30x30	12"x12"	gradone angolare costa retta grip		2		4.30			
30x60	12"x24"	elemento a L grip		4		17.20			

JOINT

per rectified material, we recommend a 2 mm grout at least when using one size only and a 3 mm grout for multisizes laying solution



Italian Tile & Stone

TERENURE SHOWROOM

Italian Tile and Stone 56
Terenure Road North, Dublin,
D6W AW88

T 01 492 4891

E info@tiles.ie

COMMERCIAL DIVISION

Italian Tile and Stone 56
Terenure Road North, Dublin,
D6W AW88

T 01 907 3700

E commercial@tiles.ie

SWORDS SHOWROOM

Italian Tile and Stone
6 Town Centre Mall, Main Street
Swords, Co. Dublin, K67 CD86 **T** 01
840 5057

E swords@tiles.ie

www.tiles.ie